

# Literature Survey on Autonomous Rover

L Hemanth<sup>1</sup>, P Srinivas<sup>2</sup>

<sup>1</sup>Student, <sup>2</sup>Associate Professor

Department of Electronics and Instrumentation Engineering

Velagapudi Ramakrishna Siddhartha Engineering College, Vijayawada, India

<sup>1</sup>[hemanth.lingamaneni@gmail.com](mailto:hemanth.lingamaneni@gmail.com), <sup>2</sup>[parchuris12@gmail.com](mailto:parchuris12@gmail.com)

## Abstract —

In the present era of automation, the Autonomous Rovers have emerged as the prime technology for implementing security and surveillance system which handle human lives. Its potential of being navigated in the environment with no physical devices and human intervention has made it more eminent and efficacious. With the progressive technology, the provision of autonomous vehicles has enhanced their skill to assist and perform in exploration and rescue missions, etc. The survey determines the interpretation of various sensors, actuators and their assimilation for navigation and estimation of the autonomous rover.

**Keywords** — Autonomous, Skid steering, Sensors, Lidar and Radio telemetry

## Introduction

Autonomous rover is a system that operates in an unpredicted and partially unknown environment. Self-operated vehicles have been grown drastically in various applications in recent times. The smart vehicles that are capable of functioning without human intervention are known as Autonomous Rovers. These automated vehicles are designed or developed for various indoor and outdoor application fields. Autonomous mobility for vehicles in an unstructured environment over long distances is still a daunting challenge in security and surveillance. There are many approaches to developing path planning and obstacle avoidance for rover movement.

The various parameters are observed by the sensors mounted on the vehicle and the necessary actions are implemented by the controller. The whole system function is generated with the coordination between the hardware and software arrangement. The approach of configuring the system formation with sensors and other components provides momentous interaction with in the rover. With the ability of the rover, it is categorised as:

1. Automatic: vehicle will be capable of operating itself in the instructed path and also deviates manual with operator control instructions
2. Automated: vehicle is limited with an ability to function in the instructed path using automatic functionality system.
3. Autonomous: self-governed vehicle that can be travelled without an operator with-in the specified path and guides the vehicle unassisted to navigate around fixed and mobile obstructions [1]

The paper deals with the various autonomy levels of the unmanned system with the different sections and design approaches.

## I. DESIGN APPROACH OF AUTONOMOUS ROVER

In the design approach of the autonomous rover, the foremost task is design or development of the Vehicle body, then the selection of the hardware components, that fulfils the requirements of the vehicle in terms of sensing and movement in the environment.

Figure 1 describes the block diagram of the autonomous rover; the division of hardware and software section is shown.

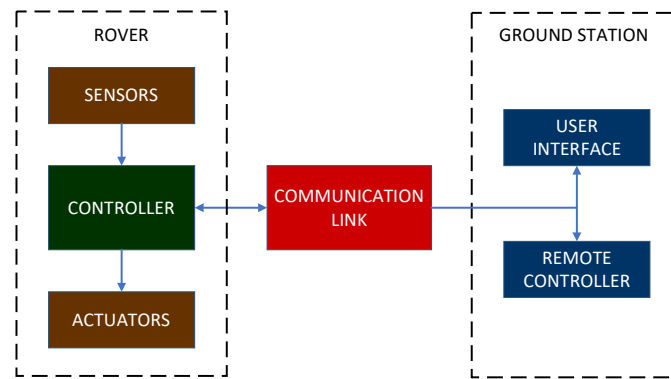


Figure 1 General functioning block diagram of the autonomous rover

A. Locomotion

The locomotion system is the most important feature in the mobility of the autonomous rover, here various factors that should be considered are **manoeuvrability, mechanical complexity, control complexity and power**. The hardware function mainly depends on the design of the vehicle body and its mechanism. For designing

the vehicle effectively, the various approaches and methods are tabulated in table I, they are compared based on various criteria as manoeuvrability: mobility of vehicle, mechanical complexity: in designing, control complexity: in controlling the vehicle power: in terms of the vehicle movement with respect to the different steering modes of explicit, Ackerman, Skid and Axle articulated [2]

Table I COMPARISON OF DIFFERENT STEERING SYSTEMS

Type	Explicit	Skid	Coordinated Ackerman	Axle Articulated
<b>Manoeuvrability</b>	High/Medium	High	Medium	Medium
<b>Mechanical Complexity</b>	Medium	Low	Medium/High	Low
<b>Control Complexity</b>	Low	Low	Medium/Low	Medium/High
<b>Power</b>	Medium	High	Medium/Low	Low

Figure 2 represents the comparison of different steering mechanism. The skid steering type mechanism is considered as the efficient mechanical function for vehicle movement [3]. The noteworthy difference between the explicit and skid steering is the carry of torque, in case of skid steering the motion is derived by applying different velocities to independent wheels, which limits rotation with in one axis.

The concentrated drive can pass the torque instantaneously to each wheel. The major issue in the skid steering is the consumption of power, as all the driving wheels are coupled with separate motors independently so, the relevant power loss with dynamic friction is increased.

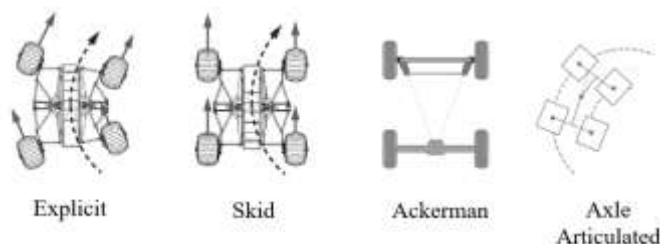


Figure 2 Different steering mechanism

### B. Strategy

The plan of action in rover is achieved by the various methods of implementation like Image processing, GPS navigation, Simultaneous Localization and Mapping (SLAM) [4]-[7]. Each of these strategies are utilized according to the application required. In case of the outdoor rover the image processing may not be applicable for large area surveillance i.e., it is difficult procedure for rover movement and path planning. So, we use the GPS navigation for the vehicle movement. In case of indoor applications, the image processing can be used where the total room will be simulated in terms of map and movement is generated accordingly with the help of Robot Operating System (ROS). In Autonomous Rover we use the GPS navigation for path planning so that the vehicle moves in coordination with the GPS coordinates provided.

The navigation Strategy is majorly categorized into two ways as local and global navigation,

they are categorized based on the distance and scale of the environment. For local navigation, grip of map is used to determine the navigation of the rover and for global navigation the coordinates connected with satellites are referred as position.

### C. Sensors

The sensing function refers to the ability of the system to provide the position and reliable information regarding the vehicle surrounding. For coordinates, direction, orientation and speed we use global positioning system (GPS), magnetic compass, gyroscope and accelerometer are used respectively.

From table II required parameters and their corresponding sensors are tabulated. The exact location of the vehicle is crucial in autonomous rover. So, the GPS is used to locate the vehicle. The direction and orientation are calibrated using the magnetic compass and gyroscope.

TABLE II SENSOR'S REQUIREMENT

Sensor	Parameter
Accelerometer	Speed
Gyroscope	Orientation
Compass	Direction
GPS	Coordinates
Ultrasonic/ Range finder/ LiDAR	Distance measurement

### D. Obstacle avoidance sensor

The significant feature that an autonomous rover should possess is sensing objects around itself from its environment. The distance measurement sensors are used for obstacle

identification and avoidance, by getting the distance between the obstacle and the vehicle, avoidance can be obtained. There are numerous sensors in identifying the distance and they are tabulated in the table III [8]-[11]

TABLE III OBSTACLE AVOIDANCE SENSORS COMPARISON

Specifications	Range finder	Ultra-Sonic Sensor	Lidar
Range(m)	0.01-0.10	0.02-4.00	0.30-12
Minimum Field of View (deg)	25	15	2
Beam Pattern	Narrow (line)	Conical	Conical
Technology	VCSEL	Ultrasonic	LED

The efficient Lidar technology is used in detecting objects, with greater operating range

of 0.3-12 meters and acceptable angle of 2.3 degrees. The working is shown in figure 3

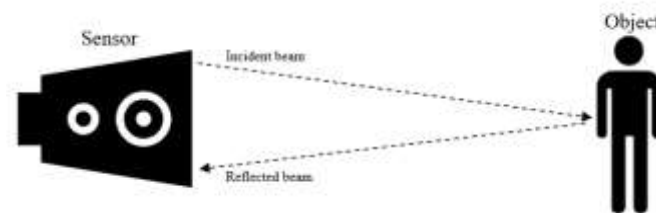


Figure 3 Working of Lidar

#### E. Communication link

With respect to figure 1 the link between the Rover and the ground station is achieved through the communication link. Communication is the essential part in remote

operated vehicles and in time of manual operation, the human intervention is necessary during its operation. In the view of the application the range of the communication module is selected. Various communication modules are tabulated in the table IV [12]-[16]

TABLE IV COMPARISON OF THE COMMUNICATION MODULES

Specifications	Bluetooth	Wi-Fi	Radio
Range(m)	50	400	2500
Frequency	2.4Ghz	80Mhz	433Mhz
Module	HC-05	ESP8266	3DR

From table IV analysis the radio connection called as telemetry is used for communication between rover and the ground station. All the values from the sensor are seen in the ground station through these communication link, the parameters like acceleration, orientation, direction and position can be viewed in the user interface in ground station. The sonar contacts i.e., Lidar readings are also shown.

#### F. Controllers

The robustness of autonomous vehicle wholly depends on the controller. With the wide specifications of the controllers, diminishing the error and managing the vehicle in the correct position sets the vehicle self-reliant and adaptive. In this autonomous rover the sensors are crucial. In comparison of the table V, for each and every controller the corresponding sensors and their interfaces are tabulated, with

the external mount sensors there might be slight lag or error present

TABLE V COMPARISON OF CONTROLLERS

Platform	Processors	Sensor (On Board)	Interfaces	Software	Operating system
<b>Arduino Micro controller</b>	ATmega 328P Micro controller	Nil	Multiple low- and high-level sensors	Arduino IDE	Arduino CLI
<b>Raspberry -pi</b>	ARM1176JZF -S Processor	Nil	I2C, SPI, VNC	Linux, Raspberry pi OS	Raspbian
<b>NI MyRIO</b>	ARM Cortex A9	3 axis accelerometers	USB, 2 x16 Digital I/O port lines	LabView	Windows
<b>Pixhawk</b>	ARM Cortex M4	Gyroscope, accelerometer, Barometer, Magnetometer	PWM, PPM, ADC inputs, UART, CAN, SPI, I2C	Ardupilot, QGround station	NuttX ROS
<b>Nvidia Jetson nano</b>	ARM <sup>®</sup> Cortex <sup>®</sup> -A57 MP Core processor	Nil	1x USB 2.0 Micro-B, 4x USB 3.0	JetPack SDK, DeepStream SDK	Linux

Likewise, in case of the on-board mounted sensors functions perfectly minimize the error. From the comparison table there are no on-board sensors mounted on the raspberry-pi, Arduino or any micro controller. In choosing these controllers for the autonomous rover creates a

hardware complexity in integrating them all together. In another perspective all sensors are not compatible with all controllers, the transmission properties also matter. So here pixhawk autopilot controller works perfectly for our required specification. [17] – [20]

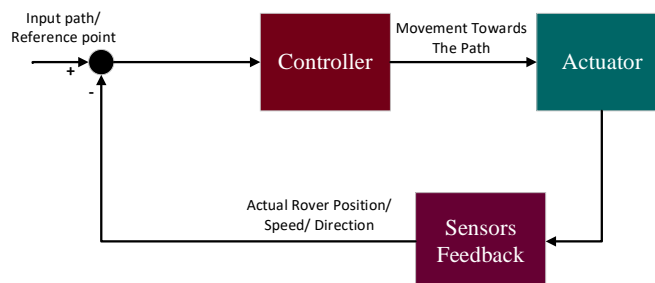


Figure 4 Block Diagram of Controller Working

Figure 4 represents the general functioning block diagram of a controller, with considered

the reference point and matching it with the sensor's feedback keeps the rover more stable

and accurate. From, table 2 all the sensors are required in positioning the rover accurately.

There are inertial based sensors mounted on the controller called as IMU (Inertial Measurement Unit). It is a combination of accelerometers, gyroscopes and magnetometers. These sensors are being mounted on the controllers where the system depends on them to serve applications. Calibrating these sensors based on the controller performance enhances the working of the autonomous rover. This sensor system is largely deployed in robotic and mobile navigation systems. Pixhawk is one of its kind for having IMU unit mounted.

## II. SUMMARY OF VARIOUS APPROACHES

From specifying the block diagram of autonomous rover, the method of the locomotive system compared in table 1 draws the skid steering mechanism in bringing the more efficient power to the rover. The GPS navigation strategy considered for the outdoor movement of the rover on assimilation with the object detection parameter which strengthens the autonomous capability to the rover. From table 4, the stable communication setup with the radio frequency techniques enhances the long-range ability to the system with minimization of error and lag to the error in communication link. Table VI represents the overall comparison of various controllers integrated with different sensors. Skid Steering mechanism is efficient for the

rover with the GPS navigation strategy, the movement of the rover will be in the specified path. The Lidar technology is more functional for the object detection with the transmission of light rays. All the sensors included in the controller i.e., IMU unit enhances the autonomous capabilities of the rover and establishment of the radio telemetry communication with long range provides the position and status of the rover.

## III. CONCLUSION

The new technologies have enhanced and facilitate the way of life of human beings in which their exposure and environmental dangers and hazard have been cut down to the minimum. In this paper, we have been able to present a background and analyse the challenges of an autonomous rover. The objective of the autonomous operation in various location where human intervention is not feasible in all the situation, in that criteria self-diagnosis of faults and fault tolerance are the characteristics that an autonomous rover must possess. Utilizing a single sensor to detect the pose of an object may not be reliable and accurate thus, the use of multi-sensor is supported for effective performance. Finally, the paper emphasized some of the research areas that can be inspected for better work.

Controller	Software
ARM 7	Windows form application
NI MyRIO/IMAQ Vision/Arduino megaLabVIEW/	
Arduino mega Arduino IDE	
2560	
Nvidia JetsonJetPack SDK TX2	
Computer	Microsoft Visual
Arduino uno	Arduino IDE
Arduino uno	Arduino IDE
Computer	Nil
Arduino mega Arduino IDE	
Arduino UNO	Arduino IDE
Raspberry pi	Raspbian
Raspberry pi, Raspberry uno	Raspbian
Raspberry pi	Raspbian
Raspberry pi	Raspbian
Raspberry pi, Raspberry UNO	Raspbian, Arduino IDE

S. No	Reference paper	Steering	Strategy TABLE VI COMPARISON OF VARIOUS APPROACHES	Sensors	Communication link
1	J. Suthakorn, et al. [3]	Skid	Map generating and path planning	Compass, Accelerometer,	camLAN
2	Arif Ainur Rafiq, et al. [4]	Rocker Bogie	Image processing	Camera	Wireless Joystick PS2
3	M.Haritha, et al. [5]	Ackerman	GPS Navigation	GPS module, Ultra-sonic	Nil
4	Riccardo Giubilato, et al. [6]	Skid	Simultaneous localization and mapping	Lidar	On board Communication
5	İlker Ünal, et al. [7]	Ackerman	GPS Navigation	GPS module, Ultrasonic	Microsoft SQL Server
6	R. Vairavan, et al. [8]	Ackerman	Obstacle avoidance	Ultrasonic	Nil
7	Sandeep Polina, et al. [9]	Ackerman	Line Following	IR	Nil
8	Carlos Fernandez, et al. [12]	Ackerman	GPS Navigation	GPS module, Lidar	Mobile Telecommunication
9	Mohammed Z, et al. [13]	Skid	GPS Navigation	GPS module	Xbee
10	Shridhar J A, et al. [14]	Nil	Machine Learning	Ultra-sonic, IR	RF Trans receiver
11	Yasir A, et al. [15]	Skid	Object detection	Camera, Ultra-	Wi-Fi
12	Md. Razaul Haque Usmani, et al. [16]	Skid	Machine Learning	Camera	Wi-Fi
13	Prof. Z. V. Thorat, et al. [17]	Ackerman	Machine Learning	Camera, Ultra-	Wi-Fi
14	Raj Shirolkar, et al. [18]	Nil	Edge detection	Camera	Wi-Fi
15	N.Suganthi, et al. [19]	Nil	GPS Navigation	GPS module, Ultra-sonic	Wi-Fi

## REFERENCE

- [1] Bostelman, Roger & E Messina, "A-Ugv Capabilities", Third IEEE International Conference on Robotic Computing, 2019
- [2] P Sharma, Nikita S, Suraj P, "Review of Various Steering Systems for Unmanned Ground Vehicle", International Journal Innovative Research in Science, Engineering and Technology, April 2016, Vol. 5, Issue 4
- [3] Suthakorn, Jackrit & Shah, Syed & Jantarajit, Suratana & Onprasert, W. & Saensupo, W. & Saeung, S. & Nakdhamabhorn, Sakol & Sa-ing, Vera & Reungamornrat, "On the Design and Development of a Rough Terrain Robot for Rescue Missions", International Conference on Robotics and Biomimetics, Feb 2009
- [4] Rafiq, Arif Ainur & Yusuf, Muhamad & Pujono, "Implementation of Digital Image Processing Using NI Myrio and Arduino Mega 2560 As Controller on Rover Bogie Robot", International Conference on Applied Science and Technology, 2018
- [5] Haritha M, & Kavitha T, & Bhavadharni G, & Prabhu V, "GPS Based Autonomous Vehicle Navigation in Robotics Along with Directionality", International Journal of Pure and Applied Mathematics, 2018, Volume 119 No. 15
- [6] Giubilato, Riccardo & Chiodini, Sebastiano & Pertile, Marco & Debei, Stefano, "An Evaluation Of ROS-Compatible Stereo Visual SLAM Methods on A Nvidia Jetson TX2", Measurement, 2019
- [7] İlker Ünal, Mehmet Topakci, "Design of A Remote-Controlled And GPS-Guided Autonomous Robot for Precision Farming", Int J Adv Robot Syst, 2015
- [8] R Vairavan, S.Ajith Kumar, L.Shabin Ashiff, C.Godwin Jose, "Obstacle Avoidance Robotic Vehicle Using Ultrasonic Sensor, Arduino Controller", International Research Journal Of Engineering and Technology (IRJET), Feb 2018, Volume: 05
- [9] Sandeep P, Pavan Kumar B, K Prasad Rao, "Autonomous Obstacle Avoiding and Path Following Rover", International Journal of Pure and Applied Mathematics, 2017, Volume 114, No. 9
- [10] John B, Yoram K, "Obstacle Avoidance with Ultrasonic Sensors", IEEE Journal of Robotics and Automation, April 1988
- [11] Sparsh Mittal, "A Survey on Optimized Implementation of Deep Learning Models on The Nvidia Jetson Platform", Journal of Systems Architecture, Journal of Systems Architecture, 2019
- [12] C Fernandez, Raul D, D Fernandez-Llorca, Javier A and Miguel A. Sotelo, "Autonomous Navigation and Obstacle Avoidance of a Micro bus", International Journal of Advanced Robotic Systems, 2013
- [13] Mohammed Z. Al-Faiz, Ghufuran E. Mahameda, "GPS-based Navigated Autonomous Robot", International Journal of Emerging Trends in Engineering Research, April 2015, Volume 3, No.4
- [14] Shridhar J A, Shubhamangala K, Smruthi P, Swathi P, Poornima B, "Design and Implementation of Driverless Car Using Machine Learning", International Research Journal of Engineering and Technology (IRJET), June 2019, Volume: 06 Issue: 06
- [15] Yasir A, A Salim, A Dileep, Anjana S, "Autonomous Car Using Raspberry PI and MI", International Journal of Recent Technology and Engineering (IJRTE), July 2020, Volume-9 Issue-2
- [16] Md. Razaul Haque Usmani, Lafiz Maruf Rahman, Salsabil Ahmed, Imran Chowdhury, Jia Uddin, "Hazard Reconnaissance Rover Using Raspberry Pi and Multiple Sensors", International Conference on Robotics, Electrical and Signal Processing Techniques (ICREST), 2019
- [17] Prof. Z.V. Thorat, Sujit Mahadik, Satyawan Mane, Saurabh Mohite, Aniket Udugade, "Self-Driving Car Using Raspberry-Pi and Machine Learning", International Research Journal of Engineering and Technology (IRJET), Mar 2019, Volume: 06 Issue: 03
- [18] Raj S, Rohan D, Anushka D, Gayatri B, "Self- Driving Autonomous Car using Raspberry Pi", International Journal of Engineering Research & Technology (IJERT), May-2019, Vol. 8 Issue 05
- [19] N.Suganthi, R.Arun, D.Saranya And N.Vignesh, "Smart Security Surveillance Rover", International Journal of Pure and



- Applied Mathematics, 2017, Volume 116 No. 12
- [20] Maki K. Habib, Yvan B, “Robot-Assisted Risky Intervention, Search, Rescue and Environmental Surveillance”, International Journal of Advanced Robotic Systems, 2010

#### BIBLIOGRAPHY



Mr. L. Hemanth is currently pursuing his Bachelor of technology in specialization of Electronics and Instrumentation Engineering in Velagapudi Ramakrishna Siddhartha Engineering College, Vijayawada, Andhra Pradesh, India.



Mr. P Srinivas is currently pursuing his Ph.D. in solar systems in Department of Instrument technology, AU College of Engineering, Visakhapatnam, India. He is working as Associate Professor at Velagapudi Ramakrishna Siddhartha Engineering, Andhra Pradesh, India. He obtained his M.Tech degree in Electronic Instrumentation from NITW, Warangal, India. He has published several papers in International Journals and conferences. He completed two projects funded by national agencies. His areas of interest include renewable energy and Process Control.